

Features

- excellent power handling
- Small size
- 5 sections
- temperature stable
- LTCC construction with great moisture resistance, corrosion resistance, and high reliability

Applications


- sub-harmonic rejection
- transmitters/receivers
- base station of mobile communication and lab use

HT-HFCN-2700AD+



50 Ω 2900 to 8700 MHz

electrical schematic

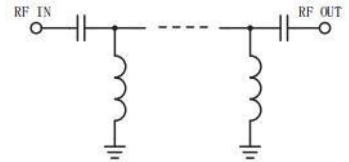

Pin Connections


RF IN	1
RF OUT	3
GROUND	2,4,5,6

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	7W at 25°C

* Passband rating, derate linearly to 3.5W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

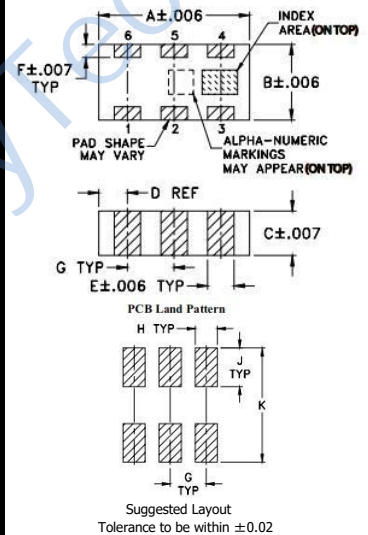


Electrical Specifications (T_{AMB}= 25° C)

STOP BAND (MHz)	FCO (MHz) Nom.	PASS BAND (MHz)	VSWR (:1)		POWER INPUT (W)	NO. OF SECTIONS
(Loss > 20dB) Min.	(Loss 3dB) Typ.	(Loss < 1.7dB) Max.	Stopband Typ.	Frequency (MHz) 1:5:1		
2150	2880	3070-8500	20:1	3400-8700	7	5

Typical Performance Data at 25° C

Frequency (MHz)	Return Loss (dB)	Insertion Loss (dB)	VSWR (:1)
5	0.11	78.03	151.59
240	0.19	55.90	90.72
1000	0.33	34.55	53.05
1650	0.40	31.36	43.94
2150	0.69	29.66	25.24
2270	0.84	28.29	20.73
2700	3.39	16.04	5.20
3000	11.10	2.08	1.77
3070	11.31	1.77	1.75
3400	18.72	0.92	1.26
6000	16.90	0.50	1.33
8500	15.85	0.81	1.38
8700	15.17	0.86	1.42
9000	14.76	0.91	1.45

Recommended PC Board Pattern

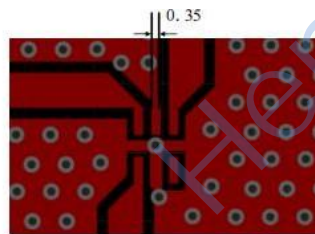

- Solder Resist
- Land
- Through-hole (0.3)

* Line width should be designed to match 50 characteristic impedance, depending on PCB material and thickness.

Outline Dimensions: Unit (mm)

A	3.20	B	1.60	C	0.89
D	0.61	E	0.56	F	0.28
G	0.99	H	0.61	J	1.07
K	3.12	wt	0.02g		