

Low Pass Filter

Features

- high rejection
- sharp insertion loss roll off
- excellent VSWR, 1.15:1 typ.@ passband
- aqueous washable

Applications

- wireless communications
- receivers / transmitters

HT-RLP-288+



50Ω DC to 288 MHz

Low Pass Filter Electrical Specifications

PASSBAND (MHz) (loss < 2 dB)	f _{co} (MHz) Nom. (loss 3 dB)	STOPBAND (MHz)		VSWR (:1)	
		(loss > 20 dB)	(loss > 40 dB)	Passband Typ.	Stopband Typ.
DC-288	310	390-455	455-1500	1.15	20

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	0.5W max.
Permanent damage may occur if any of these limits are exceeded.	


Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	\bar{x}	σ			
0.5	0.04	0.01	44.49	2.0	2.36
50	0.15	0.01	28.50	5.0	2.11
100	0.26	0.00	22.88	10.0	2.02
150	0.37	0.01	20.50	30.0	2.03
200	0.47	0.01	24.28	50.0	2.01
277	0.87	0.01	40.36	70.0	2.12
288	1.08	0.04	21.56	100.0	2.22
310	2.89	0.20	7.02	120.0	2.23
315	3.80	0.26	5.27	140.0	2.29
340	11.06	0.40	1.43	160.0	2.41
370	21.26	0.41	0.66	180.0	2.57
390	27.26	0.42	0.53	200.0	2.79
455	49.75	1.06	0.38	220.0	3.06
600	65.40	6.49	0.28	240.0	3.41
770	62.26	5.08	0.21	260.0	3.95
1000	65.73	8.41	0.18	270.0	4.31
1410	58.73	4.49	0.25	288.0	5.42
1500	67.18	6.87	0.24	300.0	6.40

Pin Connections

RF IN	2
RF OUT	6
GROUND	1, 3, 4, 5, 7, 8


Outline Drawing

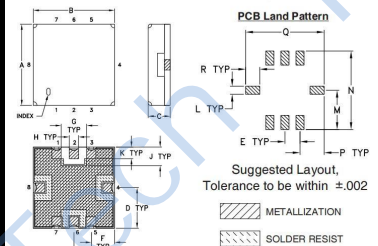


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.110	.040	.080
8.89	8.89	2.54	4.45	1.91	2.54	2.79	1.02	2.03
K	L	M	N	P	Q	R		wt.
.050	.040	.195	.390	.120	.390	.070		grams
1.27	1.02	4.95	9.91	3.05	9.91	1.78		0.25

Suggested PCB Layout

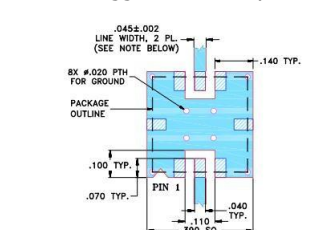

- NOTES:
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .0025" ± .0002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-

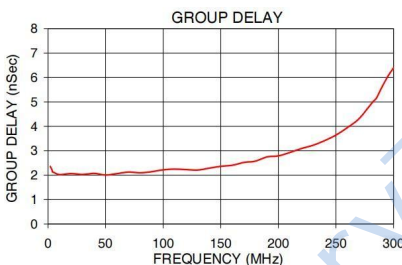

Functional Schematic

