


## Features

- low insertion loss, 0.3dB typ. @ passband
- high rejection
- shielded case
- aqueous washable

## Applications

- transmitters / receivers
- sub-harmonic rejection
- military communications

## HT-RHP-180+



50Ω 300 to 3000 MHz


### Electrical Specifications (T<sub>AMB</sub>= 25° C)

STOP BAND (MHz)		FCO, (MHz) Nom.	PASS BAND (MHz)	VSWR (:1)	
(Loss > 40dB)		(Loss > 20dB)	(Loss < 1dB)	Stopband Typ.	Passband Typ.
DC-100	DC-135	180	300-3000	18	1.2


### Typical Performance Data at 25° C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.0	76.59	1100.71
10	84.80	3575.04
30	81.89	2557.85
50	78.94	937.93
98.5	50.86	126.88
100	49.70	124.82
103	47.72	117.88
122	35.47	69.19
135	27.44	46.38
146	20.76	30.22
180	2.90	2.49
215	0.88	1.28
300	0.47	1.18
500	0.28	1.03
1000	0.26	1.12
1500	0.34	1.24
2000	0.43	1.35
3000	0.50	1.31

### Typical Frequency Response

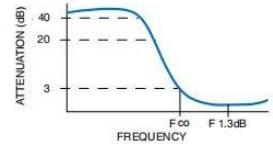

### Functional Schematic

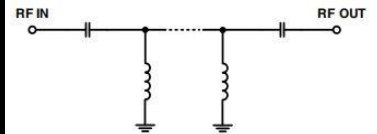

### Pin Connections

INPUT	2
OUTPUT	6
GROUND	1, 3, 4, 5, 7, 8

### Maximum Ratings


Operating Temperature -40°C to 85°C

Storage Temperature -55°C to 100°C

RF Power Input 0.5W at 25°C


Permanent damage may occur if any of these limits are exceeded.

### Outline Drawing

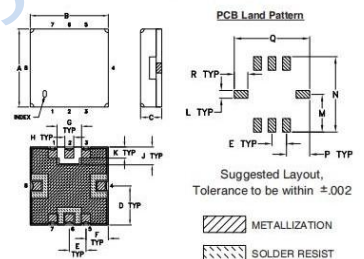


### Outline Dimensions: Unit (mm)

A	8.89	B	8.89	C	2.54
D	4.45	E	1.93	F	2.54
G	2.79	H	1.02	J	2.03
K	1.27	L	1.02	M	4.95
N	9.91	P	3.05	Q	9.91
WT		R	1.78		

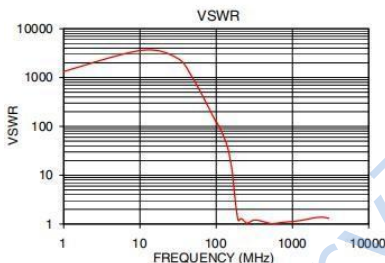

### Demo Board MCL P/N: TB-332 Suggested PCB Layout (PL-176)

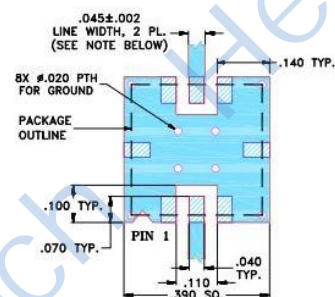

#### NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK