


This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission.

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的销售、销售及采购。

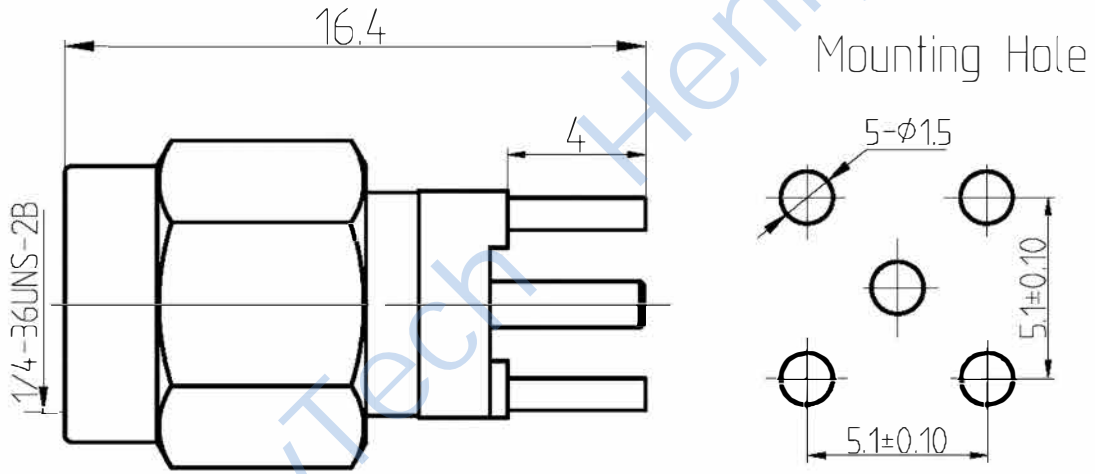

电气指标

1. 频率范围: DC ~18GHz
2. 接触电阻
内导体: $\leq 3 \text{ m}\Omega$
外导体: $\leq 2 \text{ m}\Omega$
3. 绝缘电阻: $\geq 5000 \text{ M}\Omega$
4. 介质耐压: 1000V(rms)
5. 使用寿命: 500次↑
执行标准 GB681A(MIL-C-39012)

材料&镀层

1. 中心接触件: 黄铜, 镀金
2. 外壳: 黄铜, 镀金
3. 绝缘子: PTFE

Electrical Characteristics:

1. Frequency range: DC ~18GHz
 2. Contact resistance
Center conductor: $\leq 3 \text{ m}\Omega$
Out conductor: $\leq 2 \text{ m}\Omega$
 3. Insulation resistance: $\geq 5000 \text{ M}\Omega$
 4. Insulator withstanding: 1000V(rms)
 5. Durability: 500cycles
- Application: GB681A(MIL-C-39012)

Material&Finishing

1. Center contact: **Brass, gold plated**
2. Body :brass, **gold plated**
3. Insulators: PTFE

FIRST ANGLE PROJECTION		SCALE
THIRD ANGLE PROJECTION		2:1
NAME	DATE	
H.wei	08 01 12	
DRAWN		
CHECKED	L.yu	08 01 12
APPROVED	w.yi	08 01 12

HL-SMA-JHD1
RF Coaxial Connector

UNITS
mm
REV
V1.0

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
.X± .20 °
.XX± .10 °
.XXX±