


# HLT-0.8/2-16S

## 16-Way Power Divider

### Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	800~2000 MHz
2	插入损耗 Insertion Loss	≤ 1.2 dB (Excluding theoretical loss 未含理论损耗 12.0 dB)
3	输入驻波 Input Port VSWR	Typ.1.15 / Max.1.35
4	输出驻波 Output Port VSWR	Typ.1.12 / Max.1.25
5	隔离度 Isolation	Typ.28dB / Min.20dB
6	幅度平衡 Amplitude Balance	±0.2dB
7	相位平衡 Phase Balance	±1°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	SMA-Female (不锈钢外壳, 内导体镀金 0.5 微米)
10	承受功率 Power Rating	Splitter 分路器用时 10W; Combiner 合路器用时 1W
11	工作温度 Operation Temperature	-35°C ~ +75°C
12	表面处理 Surface Finishing	Black paint
13	外形尺寸 Outline Dimensions	92*218*10 (mm)
14	重量 Weight	(g)

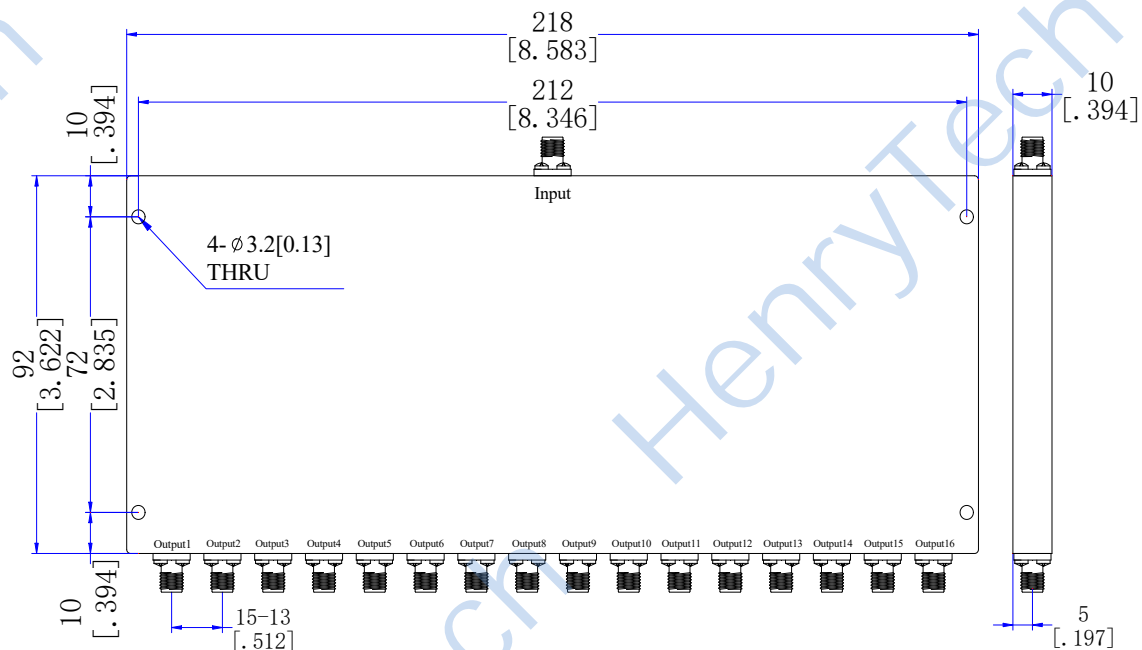

Note: Dimensions (mm / [inch]), General tolerance (±0.3)